



Pro Clear Aquatic Systems™

ProCylinder Instructions

1. Inspect the exterior packaging for damage on delivery.
2. Cut the bands that hold the box together for the box labeled "cabinet". – See image 1
3. The top part of the box can be lifted from the base for easy access to the cabinet.
4. Inspect the cabinet and sump for damage.
5. Remove the protective film from the outside of the stand and discard.
6. All plumbing parts and remote should be included in the cabinet.
 - A. Drain and return plumbing (image 2)
 - B. Gaskets (image 3)
 - C. Ribbed intake tube (image 4)
 - D. Flexible hose for return line (image 5)
 - E. Metal hose clamp (image 6)
 - F. Return Pump (image 7)
 - G. Air pump (image 8)

- If any parts are missing please call 904-448-6800 (press option 2 for customer service) before moving forward.
7. Place the stand on a level surface. The doors may need some adjusting to be level, this can be done once the aquarium is set up and filled.
8. Run the cable for the provided surge protector through the hole in the bottom of the stand. This will allow for easy cable management.
9. Cut the bands on the box labeled "Tank" (image 9) and remove the top portion of the box. The tank box will have your canopy and lighting
10. Inspect the tank for any damage that may have occurred in shipping.
11. The lids for the tank and overflow are taped down to ensure they do not damage the aquarium during shipping. Remove these before going forward.
12. Place the aquarium on the stand and line up the overflow with the cut out on the top of the stand.
13. Attach the bulkhead fitting to the intake line on the bottom of the aquarium.

14. Place the Ribbed tubing (see image 4) in the square channel in the back of the sump (image 10). Slip one of the hose clamps (see image 6) over the ribbed tubing, slide the ribbed tubing over the intake line from the aquarium.
15. Connect the return line plumbing to the return bulkhead under the aquarium.
16. Using the flexible hose provided and a hose clamp, connect the flex hose to the return plumbing and tighten the hose clamp for a snug fit.
17. Connect your return pump to the flex hose in the front most compartment.



Image 2 (Return and Drain Plumbing)



Image 3 (Gaskets)



Image 4 (Ribbed Intake tube)



Image 5 (Flexible hose for return line)



Image 6 (Metal Hose Clamp)



Image 7 (Return Pump)

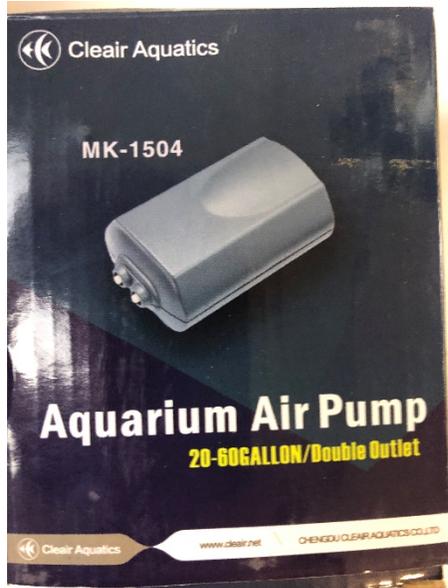


Image 8 (Air pump. Model may vary.)

If your remote does not work with your lights it may need to be programmed to the lights. To do so, turn the lights on using the toggle switch on the cord. Hold ANY button on the remote for 20 seconds then release the button. Turn the lights off and then back on using the toggle switch. Point the remote at the lights (the RF will penetrate the acrylic canopy so there is not need to remove it) and press the on button.